

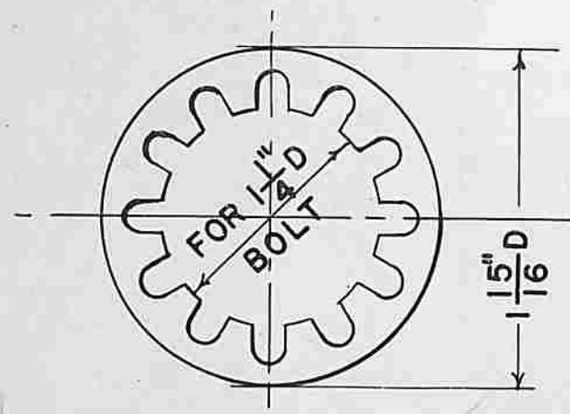



SHAKEPROOF LOCK WASHER
INTERNAL TOOTH-TYPE 12
WASHER THICKNESS .062

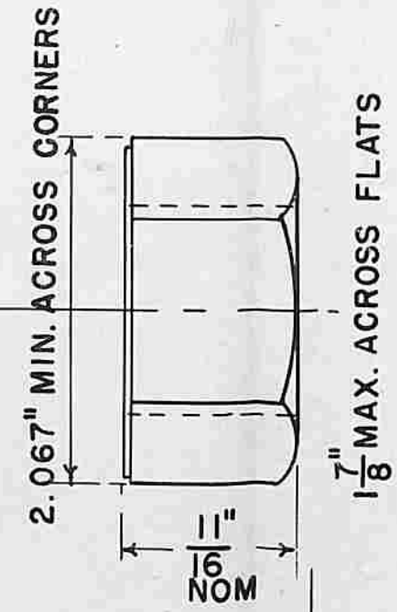

1 1/4" S.A.E. REGULAR HEX. JAM NUT
SEMI-FINISHED. WASHER FACED
12 S.A.E. THDS. PER INCH.
CLASS 3 FIT.

HEAT TREAT NUT TO EQUAL
STENGTH OF BOLT.

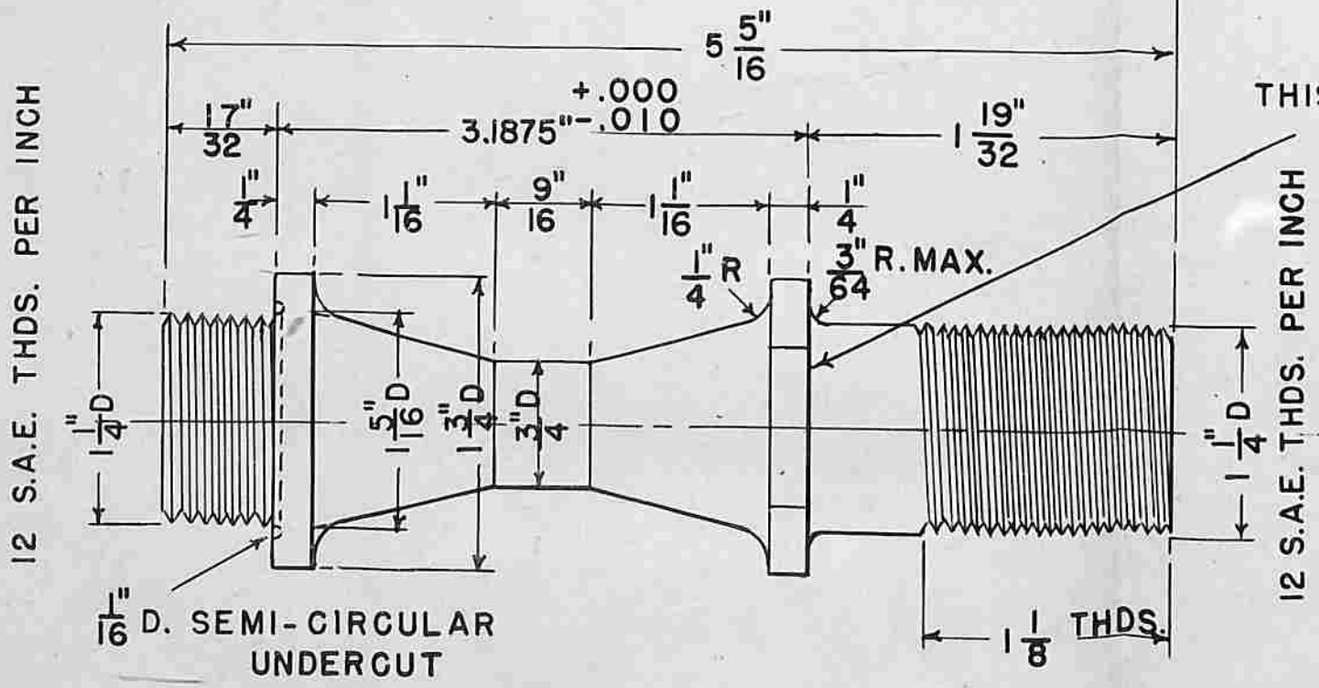

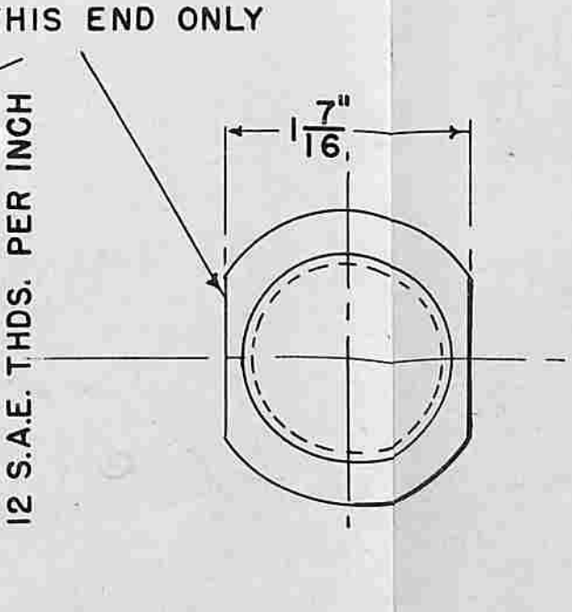

SPACER BOLT. 6 REQUIRED PER WHEEL.
COMPLETE WITH HEX. NUT AND WASHER.

CARBON MANGANESE STEEL-S.A.E. T-1340
HEAT TREAT TO PRODUCE 90,000 LBS. ELASTIC LIMIT

SPACER BOLT FOR WHEEL D-2 (CARNEGIE)	
TRANSIT RESEARCH CORP. 292 MADISON AVE. NEW YORK, N.Y.	
USE DIMENSIONS ONLY	D2-4b1